

□□□ , □□ -2□□□ , 400 A IEC, □ ,
□□□□□

Data Solutions

???

SB2C400AL



nVent ERIFLEX

????????????????????(???????)??/?????? DIN

????/????????????????????????????????

????????????????????4????nVent ERIFLEX Flexibar Advanced,
??IBSB Advanced ?????

??



??

??????????????? nVent ERIFLEX Flexibar Advanced ? IBSB Advanced ?????

???????????????

????????????????????????????

???????????

??????????????????

??????????????????

????? DIN ????????????

??????????

??? 95%

????????????????????????(RoHS) ??

?? EN 45545???? R23 ?? HL3 ??? R22 ?? HL2 ?

?????????? ??????


????

???: 561166
?: ?
?: ??-2 ???
????????IEC: 400A
?: ?; ???
????????IEC: 240 mm ²
????????IEC: (2) 120 mm ²
????? (ICW) 1 ? : 28.8kA
?????IEC: 670A
?????UL/CSA: 335A
????? (Ipk): 51kA
????? (ICC): 24.3kA
????? (SCCR): 100kA
?????IEC (Ui): 1000; 1500
?????UL (Vin): 1000
?????: 1
?????: 95 - 240 mm ²
?????: 3 – 400
?????: (2) 35 - 120 mm ²
?????: 2
????? - ??: (2) 35 - 120 mm ²
?????: (2) #2 – 250 ???
?? (D): 82.2mm
?? (H): 146.4mm
?? (W): 41.5mm
????: 0.3kg
?????: UL® 1059
?: IEC® 60947-7-1
?????: IP 20
?????: UL® 94V-0

??????

SBF250?SB250SPCR?????UL1953????? ??UL® 1953????????1250VAC/DC?
????????????????7%

■■■■■■■■■■■■■■■■■■■■										
????*?? (°C) ????? 85°C ?????										
???? (°C)	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°
???? (d)	1	1	1	0.94	0.88	0.82	0.75	0.67	0.58	0.47
*???????????										

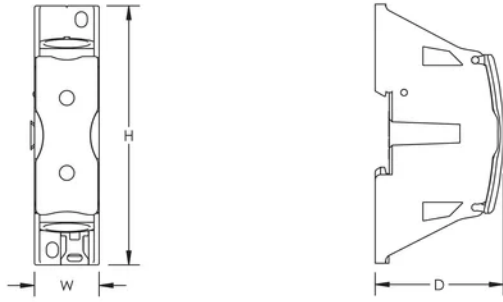

???? nVent ?????????????????? nVent ???????? www.nvent.com ???????????? nVent ??? nVent
??/????????????



?????????:
CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE