

# SBLL-250

## Data Solutions

???

### SBLL-250



??



??

??????????????

????????? nVent ERIFLEX Flexibar ???????

????????????????????

??????

??????????????????

????? DIN ????????????

????????? SBLEC ????????

?????????????????????????????(RoHS) ??

???

????

???: 561132

?: ?; ??

?: ??

????????IEC: 290A

???????UL/CSA: 255A

?????? (ICW) 1 ? : 14.4kA

?????? (Ipk): 42kA

?????? (SCCR): 100kA

???????IEC (Ui): 1000; 1500

???????UL (Vin): 1000

?????: 2

?????????: 20 – 24 mm

?????????????: 10 – 120 mm<sup>2</sup>

?????????: #8 - 250 kcmil

?? (D): 65mm

?? (H): 205.7mm

?? (W): 52.3mm

A: 108mm

?????: 0.16kg

???????: UL® 1059

??????? : UL® 94V-1


??: IEC® 60947-7-1

??????

????????????????????????????

| ????????????????              |     |     |     |      |      |      |      |      |      |      |
|-------------------------------|-----|-----|-----|------|------|------|------|------|------|------|
| ????*?? (°C) ????? 85°C ????? |     |     |     |      |      |      |      |      |      |      |
| ???? (°C)                     | 30° | 35° | 40° | 45°  | 50°  | 55°  | 60°  | 65°  | 70°  | 75°  |
| ???? (d)                      | 1   | 1   | 1   | 0.94 | 0.88 | 0.82 | 0.75 | 0.67 | 0.58 | 0.47 |
| *????????????                 |     |     |     |      |      |      |      |      |      |      |

?

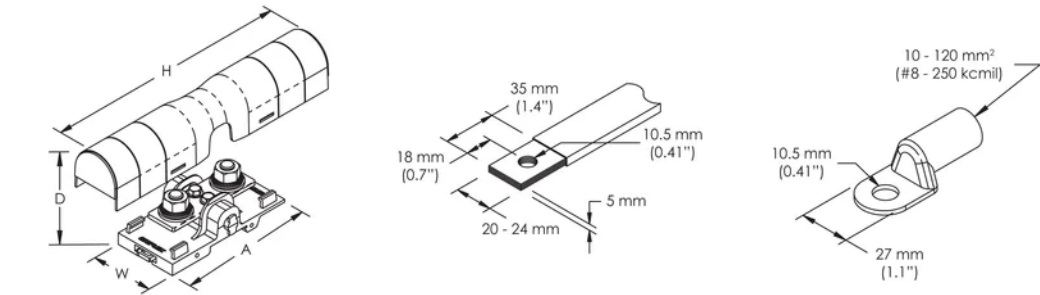

??

???? nVent ?????????????????? nVent ??????? www.nvent.com ?????????? nVent ?????????????????????????????????????? nVent  
????????????????????????????????????????????????????????????????????????????????????????????????????????????????



?????????:

CADDY   ERICO   HOFFMAN   ILSCO   SCHROFF   TRACHTE