


□□□ , □□ -□□ , 630 A IEC, □ ,
□□□□□

Data Solutions

???

SB630AL

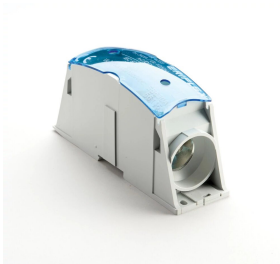

nVent ERIFLEX

????????????????????(???????)??/?????? DIN
????/?????????????????????????????????

????????????????????4????nVent ERIFLEX Flexibar Advanced,
??IBSB Advanced ?????

??



??

??????????????? nVent ERIFLEX Flexibar Advanced ? IBSB Advanced ?????

????????????????

????????????????????????????

????????????

????????????????

????????????????

????? DIN ?????????

????????

??? 95%

????????????????????(RoHS) ??

?? EN 45545??? R23 ?? HL3 ??? R22 ?? HL2 ?

????????? ??????

????


???: 561168
?: ??
?: ??-??
????????IEC: 630A
?: ?; ???
????????IEC: 500 mm ²
????????IEC: 500 mm ²
????? (ICW) 1 ?: 60kA
?????IEC: 860A
?????UL/CSA: 545A
????? (Ipk): 51kA
????? (ICC): 24.3kA
????? (SCCR): 100kA
?????IEC (Ui): 1000; 1500
?????UL (Vin): 1250
?????: 1
?????: 240 - 500 mm ² ; 400 - 1,000 kcmil
?????: 240 - 500 mm ² ; 400 - 1,000 kcmil
?????: 1
????? - ??: 240 - 500 mm ²
?? (D): 89.4mm
?? (H): 174.4mm
?? (W): 54.2mm
????: 0.58kg
?????: UL® 1059
?: IEC® 60947-7-1
?????: IP 20
?????: UL® 94V-0

??????

SBF250?SB250SPCR?????UL1953????? ??UL® 1953????????1250VAC/DC?

????????????????7%

■■■■■■■■■■■■■■■■■■■■										
????*?? (°C) ????? 85°C ?????										
???? (°C)	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°
???? (d)	1	1	1	0.94	0.88	0.82	0.75	0.67	0.58	0.47
*???????????										

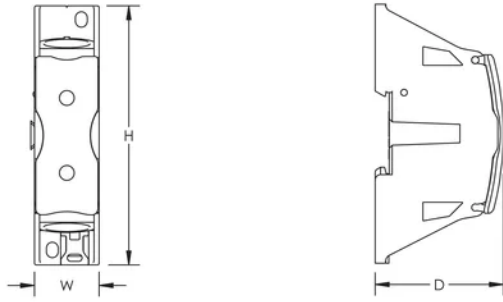

???? nVent ?????????????????? nVent ???????? www.nvent.com ?????????????? nVent ?? nVent
??



?????????????:
CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE