

nVent CADDY Superfix 243 M8/M10, 48-54 mm OD, 1 1/2" Pipe, 40 DN

???

SXD052



??



??

Includes easy closing mechanism

Combo head bolt works with slotted, hex, or Phillips drivers

Category II noise reduction according to DIN EN ISO 3822-1

Compliant for sound insulation design according to DIN 4109

Reaction-to-fire classification is "E" in compliance with DIN EN 13501-1

????

???: 400070

??: ?;EPDM-SBR ??

??: ???

??: ??

??: -50 to 110 °C

?? (OD): 48 - 53 mm

????: 1 1/2"

NB/DN: 40


?? (RS): M8;M10

?? (W): 20 mm
?? (T): 1.2 mm
???? (Sc): 5
???? (L): 25mm
????: 1300N

??????

Lining is EPDM rubber.

?

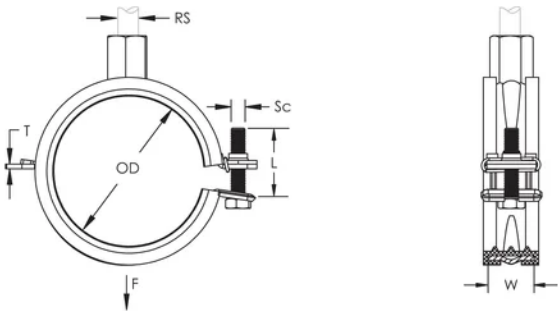

??

???? nVent ????????????????? nVent ??????? www.nvent.com ??????????? nVent ????????????????????????????????????? nVent
??/????????????

??	??	??	????
+1.800.753.9221	???	???	???
?? 1 ?????	+31 800-0200135	800 1890272	+ 86 21 2412 1618/19
?? 2 ?????	???	????/???	???
	+33 800 901 793	+31 13 5835404	+61 2 9751 8500



?????????:
CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE